

# LS-ES008R

# LED Emergency Exit Sign



## FEATURES

Injection-molded thermoplastic ABS housing

UL-94V-0 flame rating, fire-resistant

Input Voltage: 220-240V

Power consumption: 3W max.

Output: 1W max.



3.6V Nickel Cadmium Battery

Charging time: 24 hours

Discharge time: 90 minutes

Operating temperature: 0°C~40°C

Dimension: 310\*257\*110mm

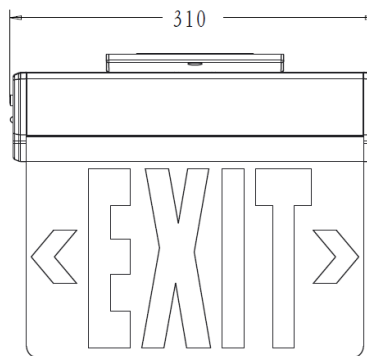

## ORDER INFORMATION

Picture	Model	Voltage	Color	Face	Discharge time	Certificate
	LS-ES008R-1C	120/277V	RED	Clear	90 minutes	UL, CUL
	LS-ES008R-1C-220	220-240V	RED	Clear	3 hours	UL
	LS-ES008R-1M	120/277V	RED	Mirror	90 minutes	UL, CUL
	LS-ES008R-1M-220	220-240V	RED	Mirror	3 hours	UL
	LS-ES008R-2M	120/277V	RED	Mirror	90 minutes	UL, CUL
	LS-ES008R-2M-220	220-240V	RED	Mirror	3 hours	UL
	LS-ES008G-1C	120/277V	GREEN	Clear	90 minutes	UL, CUL
	LS-ES008G-1C-220	220-240V	GREEN	Clear	3 hours	UL
	LS-ES008G-1M	120/277V	GREEN	Mirror	90 minutes	UL, CUL
	LS-ES008G-1M-220	220-240V	GREEN	Mirror	3 hours	UL
	LS-ES008G-2M	120/277V	GREEN	Mirror	90 minutes	UL, CUL
	LS-ES008G-2M-220	220-240V	GREEN	Mirror	3 hours	UL