

LED Slim Adjustable Wallpack Light



Advantage

- UL DLC certificate.
- Lumiled Chip, high CRI.
- IP65 driver, input voltage 120-277VAC.
- Output constant current lever can be Adjusted through output cable with 1-10V.
- No UV or IR in the beam.
- Easy to install and operate.
- Energy saving, long lifespan.
- Light is soft and uniform, safe to eyes.
- Instant start, NO flickering, NO humming.



Applications

Security, pathway and perimeter lighting, Building entryways and walkways..





LED Slim Adjustable Wallpack Light

Specifications

Model No.		
Input Power	27W	27W
Lumen	3510 LM/W	5200 LM/W
Lumen Efficacy	130 LM/W	130 LM/W
Color Temperature	4000K, 4500K, 5000K, 5700K	
CRI	>70	
Viewing Angle	150*85 Degree (Type III)	
Input Voltage	120-277VAC 50/60Hz	
PF	≥0.9	
THD	≤20%	
Driver Brand	China brand driver	
Driver Model	MSPI-NIS25W20S-430	MSPI-NIS50W21S-640
Optional Accessory	Photocell	
LED Brand	Lumileds	
LED Type	3030	
LED QTY	30 PCS	40 PCS
Housing	Aluminum Alloy	
Housing Color	Black / Dark Bronze/ white	
Waterproof Rating	WET (IP65)	
Operating Temperature	-40℃ TO 45℃	
Operating Humidity	20%-90% RH	
Storage Temperature	-40℃ TO 80℃	
Storage Humidity	10%-95% RH	
Warranty Time	5 Years	

Photometrics

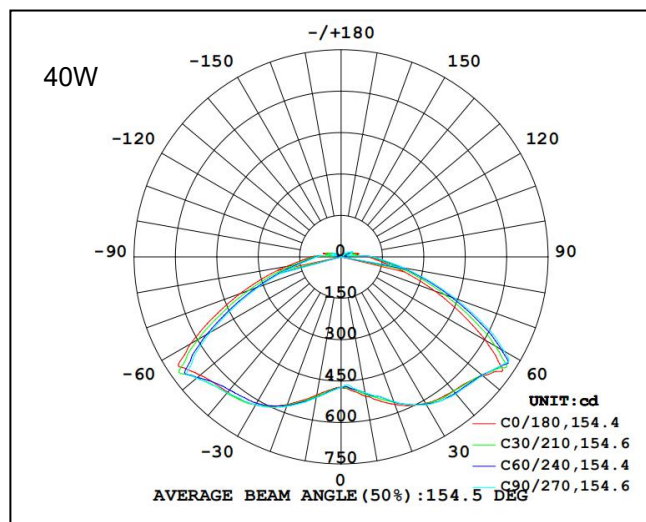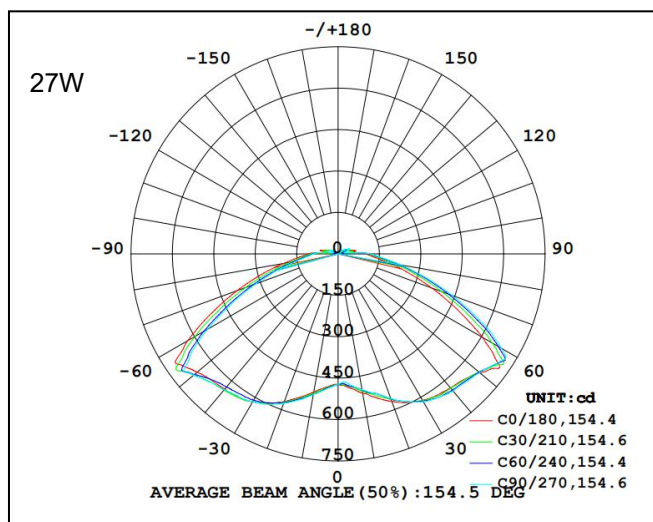

LED Slim Adjustable Wallpack Light

Projected LED Lumen Maintenance




Operating hours	0	25000	50000
Lumen maintenance factor	1	0.91	0.8

Data references the extrapolated performance projections for the WALLPACK LED platform in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

Structure



Dimensions

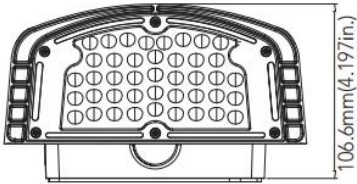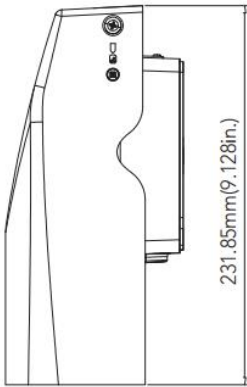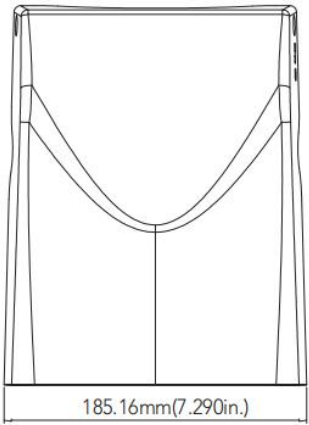

Net Weight:
27W: 1.52kg(3.351lb)
40W: 1.80kg(3.968lb)

LED Slim Adjustable Wallpack Light

Notice for User

Please turn off power before install or change assembly parts.

The input voltage and lamps should be matched, after connecting the power line,

Please make sure the wiring section is insulated.

No-professionals, must not install and disassemble the lamps.

After-sale Service

The product refers to electricians knowledge. Please don't disassemble it by yourself.

If any quality problem happens, please contact the factory for warranty details.

NOTE: Actual performance may differ as a result of end-user environment and application. All values are without notice.